

Opening Doors Worldwide!

SLIDE-SWINGDOOR
Rollin' System



★★★★★
TORMAX
AUTOMATIC

SLIDE-SWINGDOOR

Rollin' System 3251.RS

Where space is at a premium

The Rollin' System is an automatic door which takes up very little space. The two-leaf "slide and swing" concept can be used almost everywhere and is especially suitable for corridors, narrow entrances and passageways.

Enhanced safety Narrow passageways often also serve as emergency evacuation routes. No problem! This system, with its integral "break-out" unit, will always provide an exit route.

Thoughtful design The stylish and unusual opening movement will never fail to put the user in a good mood. The generous use of glass and elegant profiles provide an impression of light and space.

One System The Rollin' System is a well-engineered door. Its self-supporting design provides versatility of form, including later modifications. The system is delivered from the factory to its final destination complete with drive and sensors.

Applications

- In corridors, emergency evacuation routes, passageways, narrow entrances

Buildings

- Shops, shop in shops, restaurants, banks, hospitals, care homes, schools, laboratories, office buildings, hotels etc.

High Standards

- Complete with the TORMAX 2201 drive
- Aluminium profiles in standard RAL colours
- Extensive use of laminated 55.1 safety glass
- Operating unit with four operating modes (in/out, out only, open, closed)
- Factory integrated safety with activation and proximity sensors.
- Automatic door reversal if persons or obstacles are recognised.
- Integrated "break-out" unit to provide an escape route at any time, with auto-reset
- Floor guides positioned on existing floor – simple to install, not sensitive to dirt
- Floor locks with profile cylinder lock

Accessories

- Electromechanical locking
- Manual disengagement
- Lock for the operating unit
- Emergency OFF switch (external)
- Additional AIR-sensor for lateral security

Option


- Available without the "break-out" unit

Technical data

TORMAX Drive	Win Drive 2201
Opening speed	30 – 120 cm/s*
Hold-open time	0,5 – 120 s
System connection (power connection)	115 V AC / 60 Hz or 230 V AC / 50 Hz, 160 VA

* max. speed dependent upon the weight of the leaf and the prevailing regulations

Door positions/dimensions (mm)*

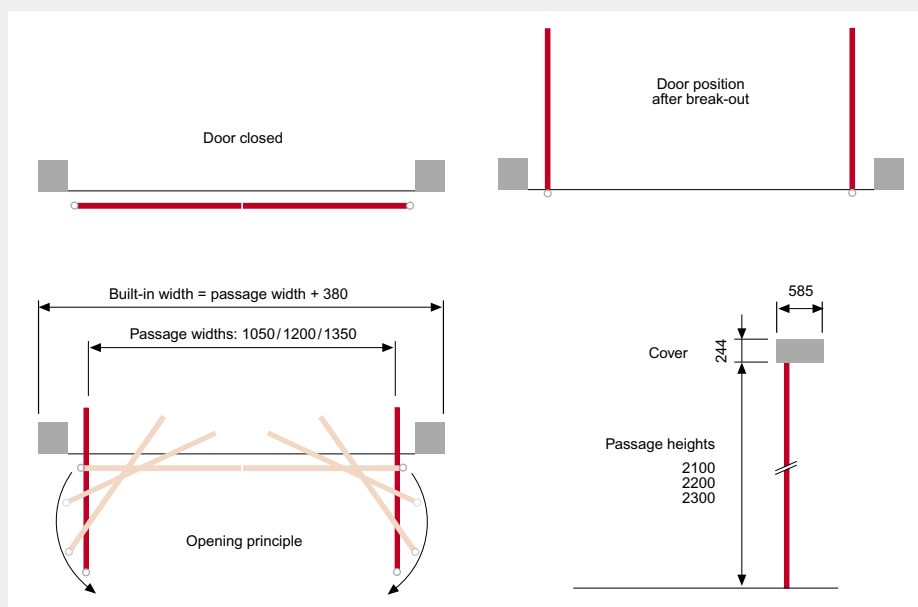

* Special sizes available on request

★★★★★
TORMAX
AUTOMATIC

TORMAX
Landert Motoren AG
CH-8180 Bülach-Zürich
www.tormax.com
info@tormax.com

TORMAX is a division
and a registered
trademark of
Landert Motoren AG